

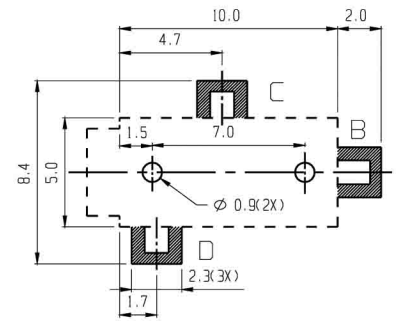


MATING PLUG





P.C.B. LAYOUT

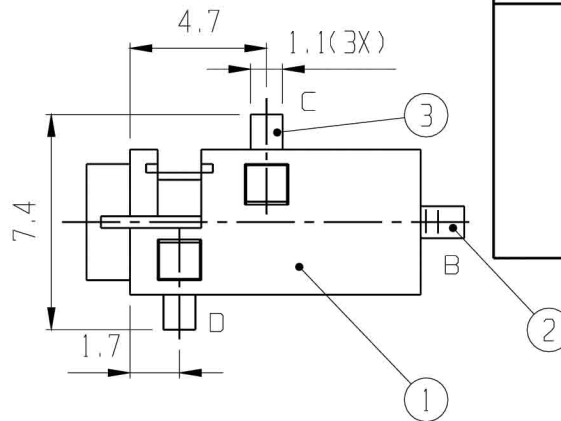

SCHEMATIC

RoHS
Compliance

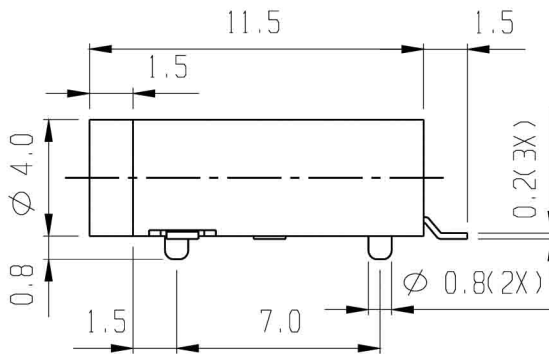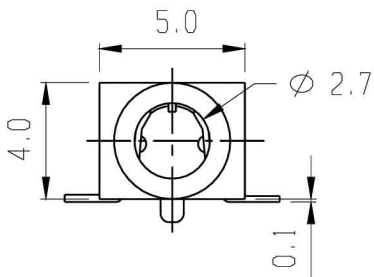

3	SPRING PLATE	CuBe	2	Ag PLATED					
1	FRAME	NYLON 46	1		2	SPRING PLATE	P B S	1	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 2.6mm SMD STEREO JACK

RATING: DC 30V 0.3A

MODEL NO: SCJ-2683-SMT-C

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

TOLERANCE

UNIT: MM

DWN.

WITHSTAND VOLTAGE: AC 500V for 1 minute

UP TO 1.0:±0.1

SCALE: 4:1

CHK'D.

OPERATION FORCE: REFER ATTACH SPECIFICATION

1.0 TO 10.0:±0.2

VERSION: 04

APPD.

SWITCHING LIFE: 5,000 cycles min.

OVER 10.0:±0.3

DRWG NO:

BY:

DATE: 23-AUG-2006

VIMEX
INTERNATIONAL CORPORATION

