



MATING PLUG




RoHS  
Compliance



SCHEMATIC



P.C.B LAYOUT

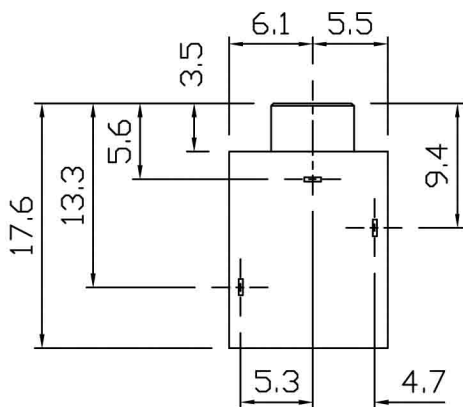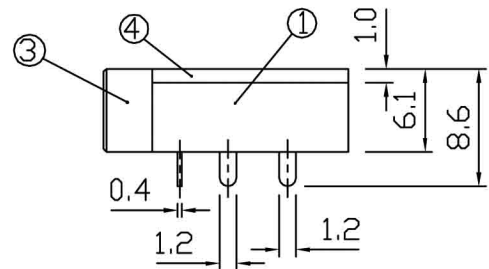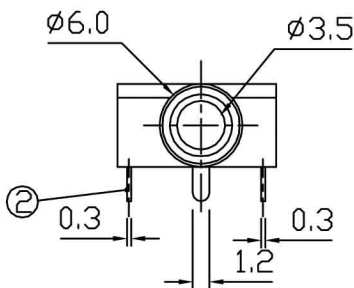

5	SPRING	STAINLESS STEEL	2	OIL TREATMENT					
3	SHEATH	COPPER ALLOY	1	NI PLATED	4	COVER BOARD	P C	1	
1	FRAME	A B S	1		2	TERMINAL	BRASS	3 Ag PLATED	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: 3.5mm STERED JACK						
	RATING: DC 30V 0.3A	MODEL NO: SCJ-0354						
	CONTACT RESISTANCE: 50mΩ MAX	UNIT: MM	DWN	白竟成				
	INSULATION RESISTANCE: 100MΩ AT 500V DC	SCALE: 2:1	CHK'D	汪志勇				
	WITHSTAND VOLTAGE: AC 500V for 1 minute	TOLERANCE: ±0.2	APPD.	万运和				
	OPERATION FORCE: REFER ATTACH SPECIFICATION							
	SWITCHING LIFE: 5k cycles min							

BY: 万运和  
DATE: 11-NOV-2006



DRWG NO:  
VERSION: 3.0