

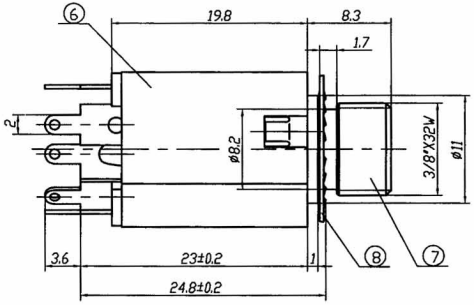





PCB MOUNTING HOLES
(VIEWED FROM COPPER SIDE)



CIRCUIT DIAGRAM



WASHER

NO.	NAME	QTY	MATERIAL(THICK,COLOR)	REMARK
8	WASHER	1	H62Y t=0.4 (C2680R-H)	Ni-PLATED(Cu:2-3um, Ni:2-3um) RoHS COMPLIANT
7	SLEEVE	1	H59 (COPPER ALLOY)	RoHS COMPLIANT
6	BODY	1	PBT+10%GF 94V-0	RoHS COMPLIANT
5	5# TERMINAL	1	H62Y t=0.4 (C2680R-H)	Ag-PLATED(Cu:2-3um, Ag:0.3um) RoHS COMPLIANT
4	4# TERMINAL	1	H62Y t=0.4 (C2680R-H)	
3	3# TERMINAL	1	QSn6.5-0.1Y t=0.35 (C5210R-H)	
2	2# TERMINAL	1	QSn6.5-0.1Y t=0.4 (C5210R-H)	
1	1# TERMINAL	1	H62Y t=0.4 (C2680R-H)	

ANGLES(DEG)	± 5°
L < 6	± 0.1
6 ≤ L ≤ 20	± 0.2
L > 20	± 0.3
TOLERANCES EXCEPT AS NOTED	

VIMEX INTERNATIONAL CORPORATION

SCALE: 1:1
VIEW:
UNIT: mm

NAME. PHONE JACK

CAT.NO. SCJ-0629HC