




SCHEMATIC



PCB LAYOUT

RoHS
Compliance

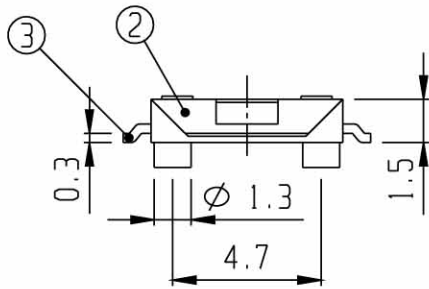

3	TERMINAL	BRASS	4	Ag PLATED	4	CONTACT	S U S	1	Ag PLATED
1	FRAME	NYLON 46	1		2	COVER	S U S	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION				TITLE: TACT SWITCH					
	RATING: DC 12V 50mA				MODEL NO: TC-12010-00					
	CONTACT RESISTANCE: 100mΩ Max.				TOLERANCE		UNIT: MM		DWN.	<i>hro</i>
	INSULATION RESISTANCE: 100MΩ at 500V DC				UP TO 1.0:±0.1		SCALE: 4:1		CHK'D.	<i>pu</i>
	WITHSTAND VOLTAGE: AC 250V for 1 minute.				1.0 TO 10.0:±0.2		VERSION: 01		APPD.	<i>[Signature]</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION				OVER 10.0:±0.3		DRWG NO:			
	SWITCHING LIFE: 100k Cycles Min.									

BY: *[Signature]*
DATE: 18-APR-2007

