

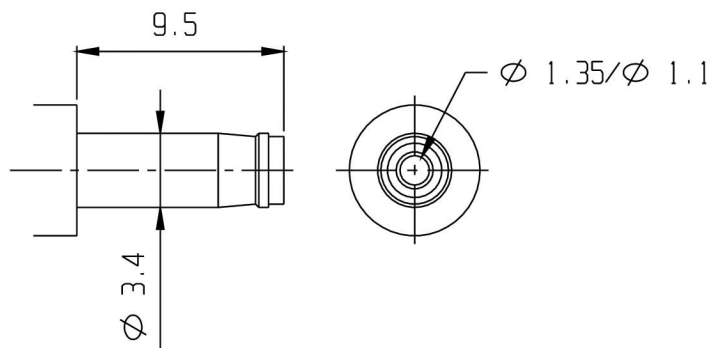



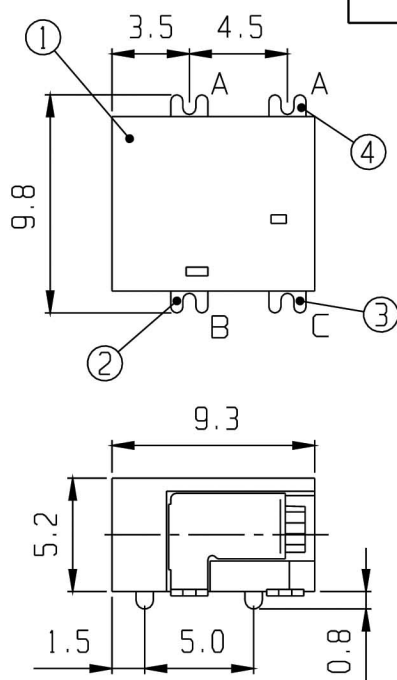


RoHS
Compliance

MATING PLUG

CENTER PIN DIAMETER
 $\varnothing 1.0\text{MM}/\varnothing 1.3\text{MM}$

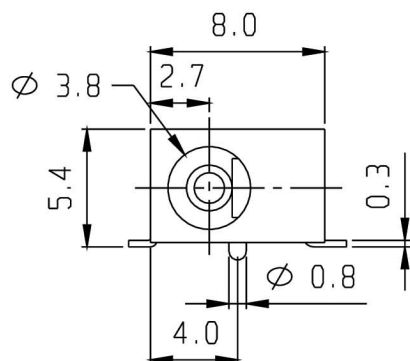

SCHEMATIC

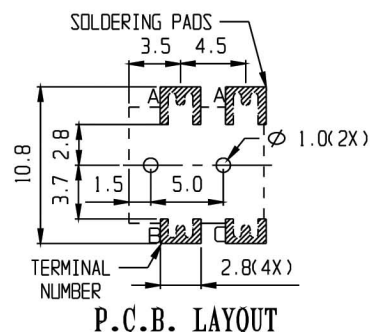

P.C.B. LAYOUT

5	CENTER PIN	COPPER ALLOY	1	Ag PLATED					
3	TERMINAL	BRASS	1	Ag PLATED	4	TERMINAL	BRASS	1	Ag PLATED
1	FRAME	NYLON 6T	1	BLACK	2	SPRING PLATE	P B S	1	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: DC POWER JACK SMD

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5,000 cycles min.

MODEL NO: SCJ-918-SMD

TOLERANCE

UNIT: MM

DWN.

UP TO 1.0:±0.1

SCALE: 4:1

1.0 TO 10.0:±0.2

VERSION: 03

OVER 10.0:±0.3

DRWG NO:

APPD.

BY:

DATE: 15-NOV-2006

VIMEX
INTERNATIONAL CORPORATION

