






MATING PLUG



SCHEMATIC

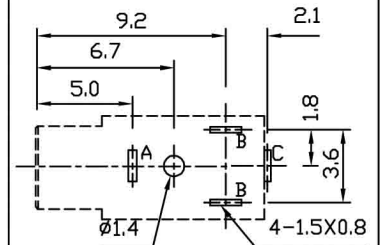

P.C.B. LAYOUT

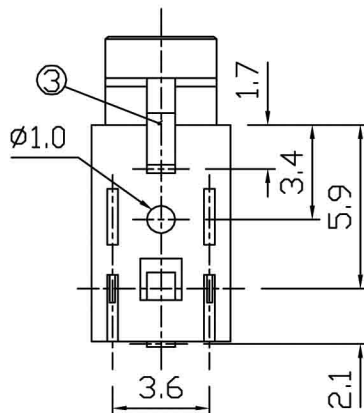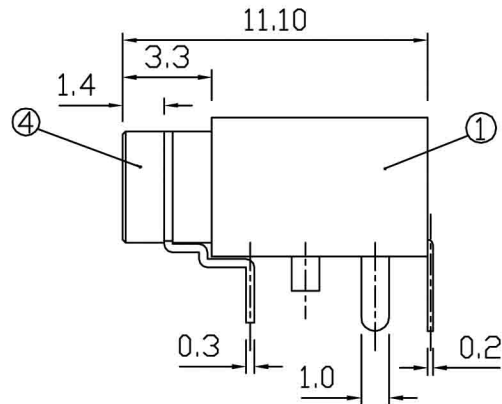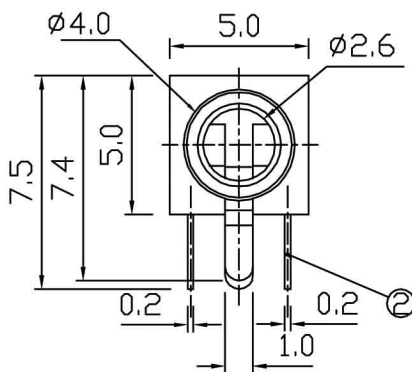

3	FIXED PLATE	BRASS	1	Ag PLATED	4	SHEATH	COPPER ALLOY	1	Ni PLATED
1	FRAME	P □ M	1		2	CONTACT PLATE	P B S	3	Ag PLATED
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS
ISSUED		SPECIFICATION				TITLE: 2.5mm STEREO JACK			
		RATING: DC 30V 0.3A				MODEL NO: SCJ-0253A-2			
		CONTACT RESISTANCE: 50mΩ MAX				UNIT: MM DWN 白竟成			
		INSULATION RESISTANCE: 100MΩ AT 500V DC				SCALE: 4:1 CHK'D 汪志勇			
		WITHSTAND VOLTAGE: AC 500V for 1 minute				TOLERANCE: ±0.2 APP'D 万运和			
		OPERATION FORCE: REFER ATTACH SPECIFICATION							
		SWITCHING LIFE: 5k cycles min							
BY: 万运和								DRWG NO:	
DATE: 25-OCT-2006								VERSION: 3.0	