


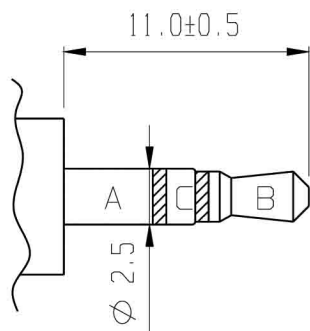


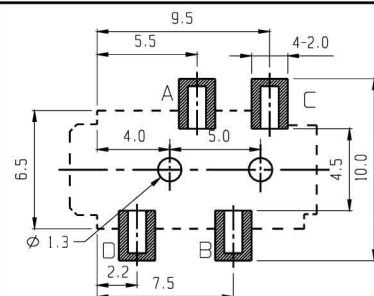

MATING PLUG

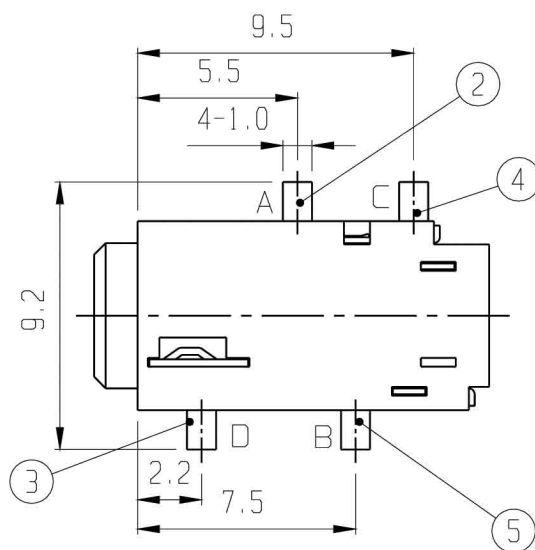


P.C.B. LAYOUT



SCHEMATIC

RoHS
Compliance

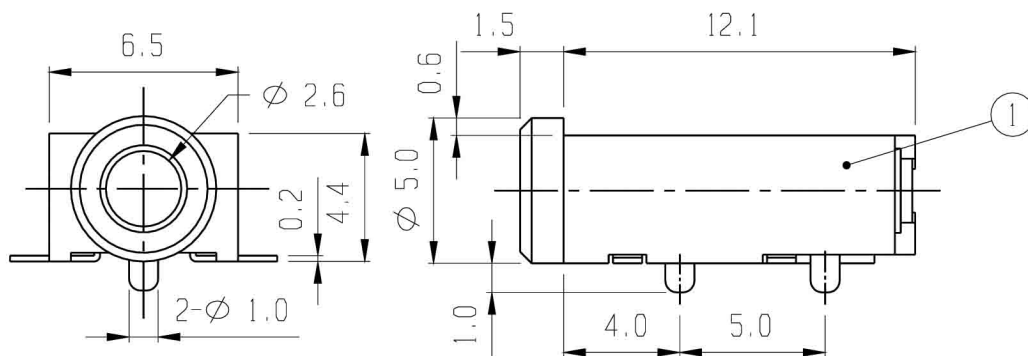

5	SPRING PLATE	CuBe	1	Ag PLATED					
3	SPRING PLATE	P B S	1	Ag PLATED	4	SPRING PLATE	CuBe	1	Ag PLATED
1	FRAME	NYLON 46	1		2	SPRING PLATE	CuBe	1	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 2.5mm SMD STEREO JACK

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5,000 cycles min.

MODEL NO: SCJ-2534-SMT-C

TOLERANCE

UNIT: MM

UP TO 1.0:±0.1

1.0 TO 10.0:±0.2

OVER 10.0:±0.3

SCALE: 4:1

VERSION: 02

DRWG NO:

DWN.

CHK'D.

APPD.

BY:

DATE: 23-AUG-2006

