






MATING PLUG



SCHEMATIC

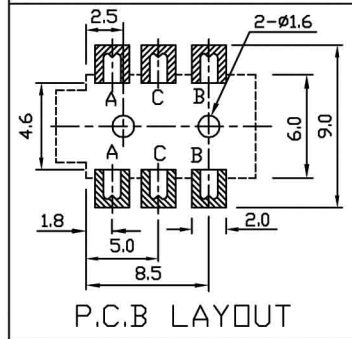

P.C.B LAYOUT

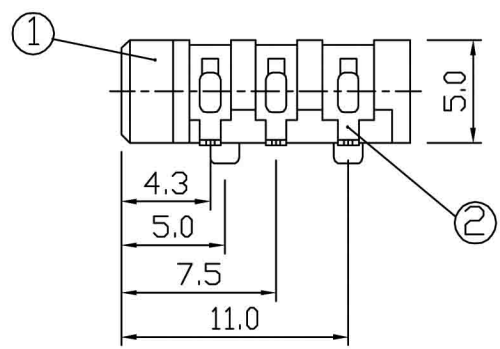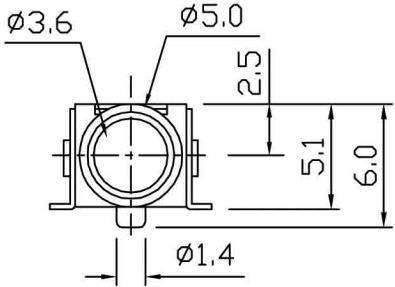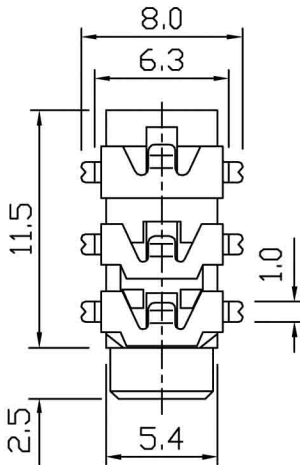

2	CONTACT	P B S	3	Ag PLATED
1	FRAME	PA46	1	
NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: 3.5mm SMD STEREO JACK		
	RATING: DC 30V 0.3A	MODEL NO: SCJ-35133-SMT-A		
	CONTACT RESISTANCE: 50mΩ MAX	UNIT: MM	DWN	白竟成
	INSULATION RESISTANCE: 100MΩ AT 500V DC	SCALE: 3:1	CHK'D	汪志勇
	WITHSTAND VOLTAGE: AC 500V for 1 minute	TOLERANCE: ±0.2	APPD.	万运和
	OPERATION FORCE: REFER ATTACH SPECIFICATION			
	SWITCHING LIFE: 5k cycles min			

BY: 万运和  
DATE: 23-MAY-2006



DRWG NO:  
VERSION: 2.0