

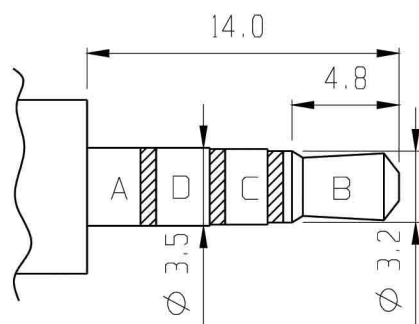








MATING PLUG

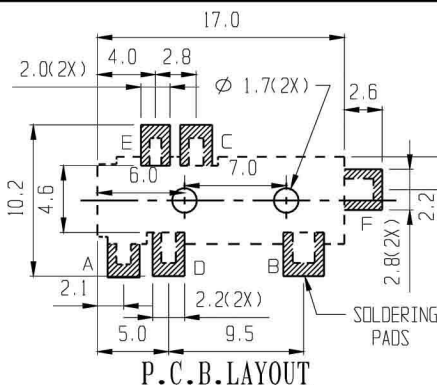

SCHEMATIC

RoHS
Compliance

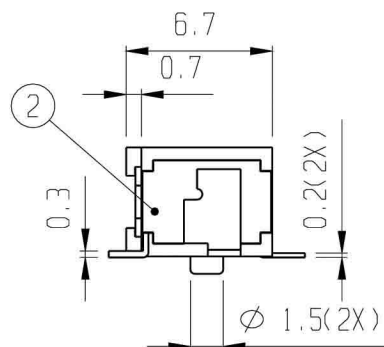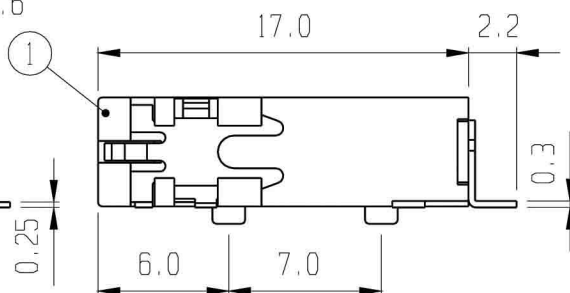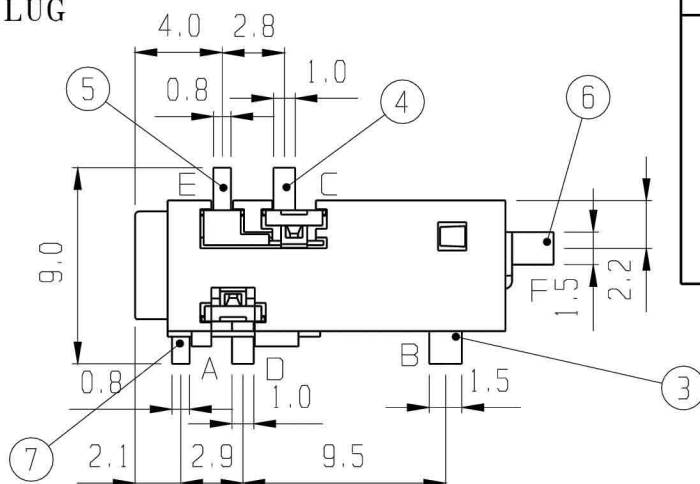

7	TERMINAL	P B S	1	Ag-PLATING					
5	TERMINAL	BRASS	1	Ag-PLATING	6	TERMINAL	BRASS	1	Ag-PLATING
3	TERMINAL	CuBe	1	Ag-PLATING	4	TERMINAL	CuBe	2	Ag-PLATING
1	FRAME	NYLON 6T	1		2	COVER BOARD	NYLON 6T	1	
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm SMD STEREO JACK

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 5,000 cycles min.

MODEL NO: SCJ-35196-SMT-A

TOLERANCE

UNIT: MM

UP TO 1.0:±0.1

1.0 TO 10.0:±0.2

OVER 10.0:±0.3

SCALE: 3:1

VERSION: 01

DRWG NO:

DWN.

CHK'D.

APPD.

BY:

DATE: 18-NOV-2002

VIMEX
INTERNATIONAL CORPORATION

