




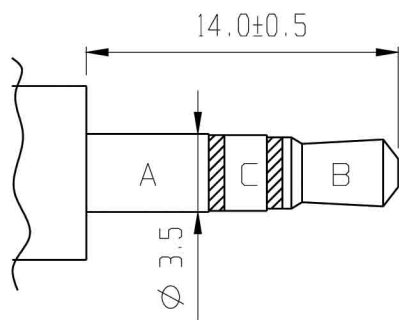



MATING PLUG

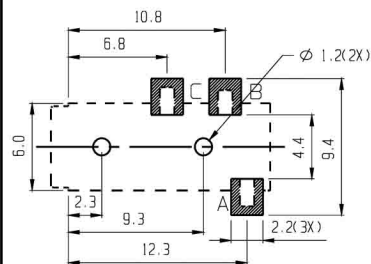

P.C.B. LAYOUT



RoHS
Compliance

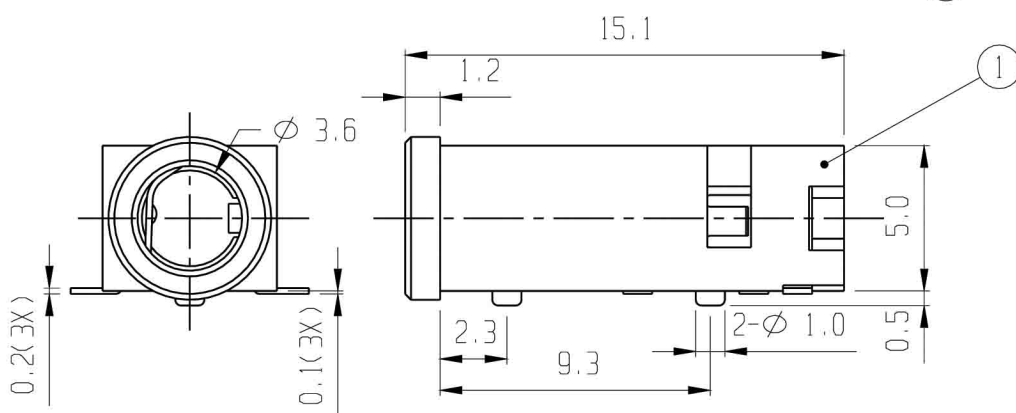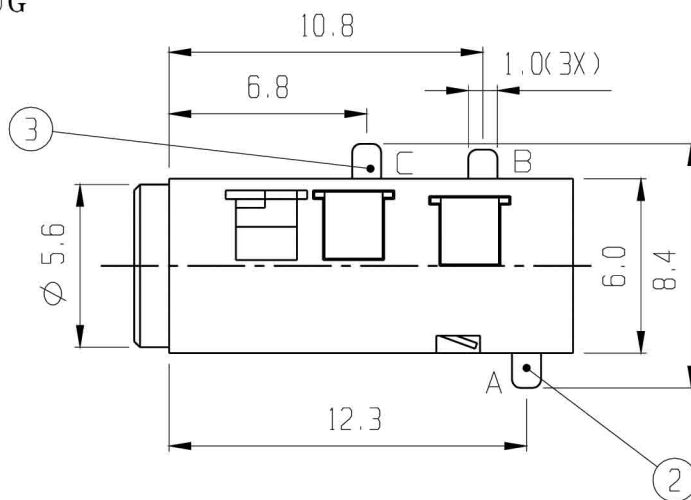

3	SPRING PLATE	CuBe	2	Ag-PLATING					
1	FRAME	NYLON 46	1		2	SPRING PLATE	P B S	1	Ag-PLATING
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm SMD STEREO JACK

RATING: DC 30V 0.3A
 CONTACT RESISTANCE: 50mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 5,000 cycles min.

MODEL NO: SCJ-3573-SMT-A

TOLERANCE UNIT: MM DWN.
 UP TO 1.0:±0.1 SCALE: 4:1
 1.0 TO 10.0:±0.2 VERSION: 03
 OVER 10.0:±0.3 DRWG NO: APPD.

BY:

DATE: 23-AUG-2006

