



CIRCUIT DIAGRAM

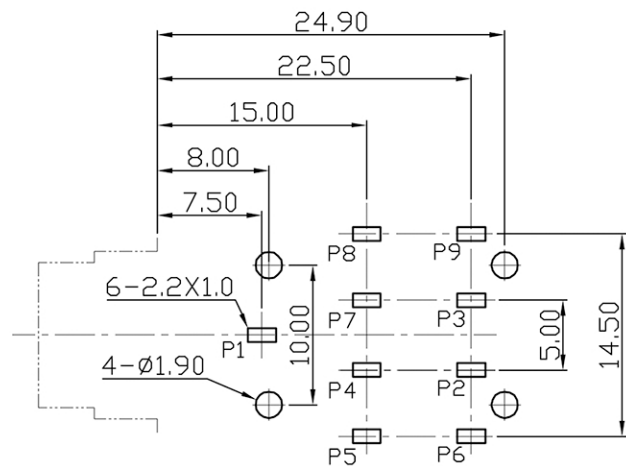

RECOMMENDED PCB LAYOUT T=1.6mm  
TOP VIEW TOLERANCE: ±0.05

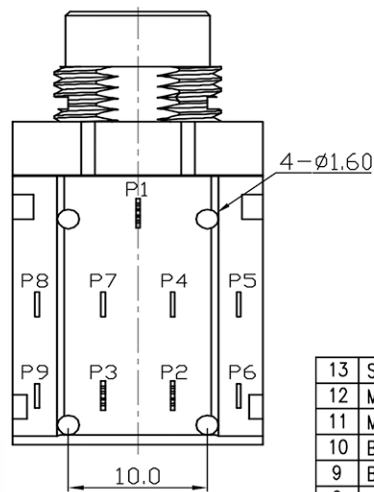

		Part Numbers	Sleeve Plating		
		SCJ-0633A-G	GOLD		
		SCJ-0633A-N	NICKEL		
13	SLEEVE	BRASS	Ni/Au	1	PCS
12	M TERMINAL-L	PHOSPHOR BRONZE T=0.25	Ag	1	PCS
11	M TERMINAL-R	PHOSPHOR BRONZE T=0.25	Ag	1	PCS
10	B TERMINAL-L	BRASS T=0.40	Ag	1	PCS
9	B TERMINAL-R	BRASS T=0.40	Ag	1	PCS
8	T TERMINAL-L	PHOSPHOR BRONZE T=0.35	Ag	1	PCS
7	T TERMINAL-R	PHOSPHOR BRONZE T=0.35	Ag	1	PCS
6	RING TERMINAL	PHOSPHOR BRONZE T=0.30	Ag	1	PCS
5	TIP SPPING	PHOSPHOR BRONZE T=0.30	Ag	1	PCS
4	EARTH SPPING	PHOSPHOR BRONZE T=0.30	Ag	1	PCS
3	INSULATOR	POM	BLACK	2	PCS
2	COVER	PC/PBT	BLACK	1	PCS
1	HOUSING	ABS/PBT	BLACK	1	PCS
NO.	NAME	MATERIAL SPECIFICATION	PLATING & COLOR	Q'TY	

Dimensions unless otherwise specified

Size Range	Tolerance
$L \leq 1$	±0.15
$1 < L \leq 8$	±0.20
$8 < L \leq 23$	±0.25
$23 < L \leq 50$	±0.30
ANGAL	±1°



SCALE: 1:1	NAME: PHONE JACK
VIEW:	CAT.NO. SCJ-0633A
UNIT: mm	