


CIRCUIT DIAGRAM

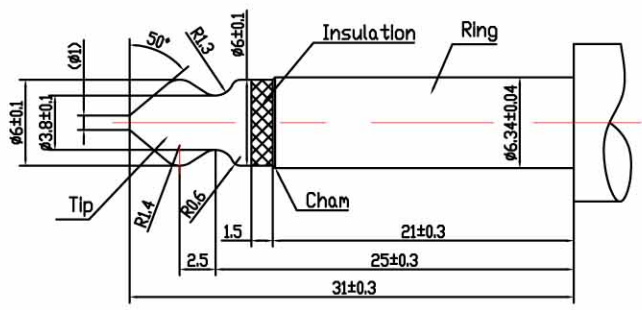

MONO PLUG

PCB MOUNTING HOLES  
(VIEWED FROM COPPER SIDE)

10	—	—	—		
9	—	—	—		
8	WASHER	1	H62Y (OR STEEL) t=0.4	NI-PLATED (Cu:2-3um, Ni:2-3um)	RoHS COMPLIANT
7	SLEEVE	1	H59 (COPPER ALLOY)		RoHS COMPLIANT
6	BODY	1	PBT+10%G.F 94 HB RED		RoHS COMPLIANT
5	5# TERMINAL	1	H62Y t=0.4 (C2680R-H)		RoHS COMPLIANT
4	4# TERMINAL	1	H62Y t=0.4 (C2680R-H)	Ag-PLATED	RoHS COMPLIANT
3	3# TERMINAL	1	QSn6.5-0.1Y t=0.35 (C5210R-H)	(Cu:2-3um, Ag:0.3um)	RoHS COMPLIANT
2	2# TERMINAL	1	QSn6.5-0.1Y t=0.4 (C5210R-H)		RoHS COMPLIANT
1	1# TERMINAL	1	H62Y t=0.4 (C2680R-H)		RoHS COMPLIANT
NO.	PART NAME	Q'TY	MATERIAL	FINISH	REMARK

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK					63 < L	± 0.5
REVISIONS						UNSPECIFIED TOLERANCES



SCALE: N/A	MODEL TYPE:
VIEW:	Ø6.35 PHONE JACK
UNIT: mm	PART NO.:
SIZE: A4	SCJ-0636HARD
	DWG NO.:
	WEIGHT
	SHEET
	REVISION
	N/A
	1/1
	A0