


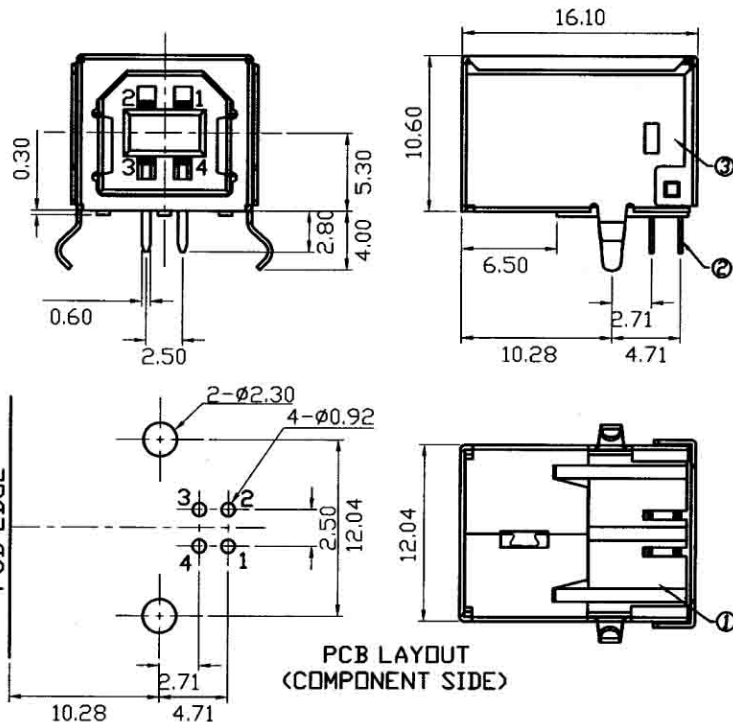

Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 500V AC (rms) for 1 Minute(Rev. 2.0)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

USB - B - HR - D - 1 - 2 - 3 Part Number

- Contact Plating
 N: *Nickel Plating
 B: Gold Flash
 C: 30u" Gold Plating
- Shell Plating
 N: *Nickel Plating
 G: Gold Plated
- Insulator Color
 : *White
 B: Black * standard

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	WHITE		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold G/F and 30u" NI-40~60u" TIN120u" (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:80~120u"	1

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20



SCALE: AS SHOWN	UNIT: mm
DRAWN WILLIS	2007/3/8
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: USB B Type
4 Pin DIP
PRODUCT NO. USB-B-HR-D
FILE NAME: USB-B-HR-D

REV.	DESCRIPTION	DATE	SIZE A4	REV.
------	-------------	------	---------	------