
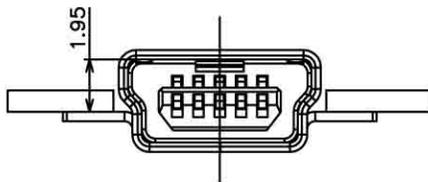
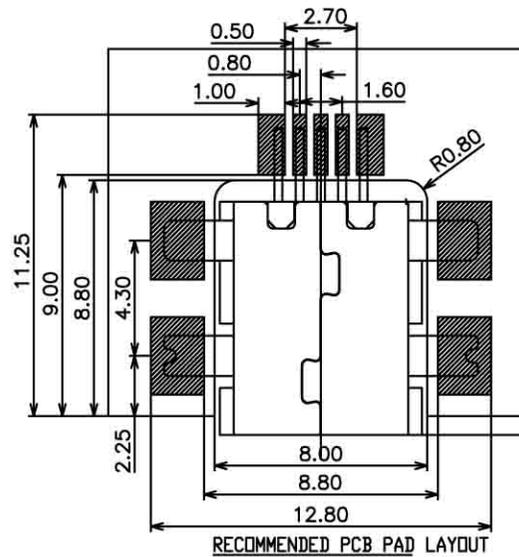


- 1.MECHANICAL:
  - MATING: 35N MAX.
  - WITHDRAWAL: 7N MIN,INITIAL.  
3N MIN AFTER 5000 CYCLES.
  - DURABILITY: 5000 CYCLES MIN.
- 2.ELECTRICAL:
  - CURRENT: 1.0A MAX
  - VOLTAGE: 30V MAX
  - WITHSTANDING VOLTAGE: 100V AC
  - CONTACT RESISTANCE: 50 mΩ MAX
  - INSULATION RESISTANCE: 100MΩ MIN
- 3.ENVIRONMENTAL
  - TEMPERATURE RANGE -20°C ~ +60°C



ASSEMBLY

RECOMMENDED PCB PAD LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN willis 2007/8/14

CHECKED / /

APPROVED / /



DRAWN NAME: Mini USB Connector  
Mid board mount Type,5Pin

PRODUCT NO. USB-M-B-RBT0-R01

FILE NAME:

REV.

DESCRIPTION

DATE



SIZE

A4

REV.

FILE NAME: