




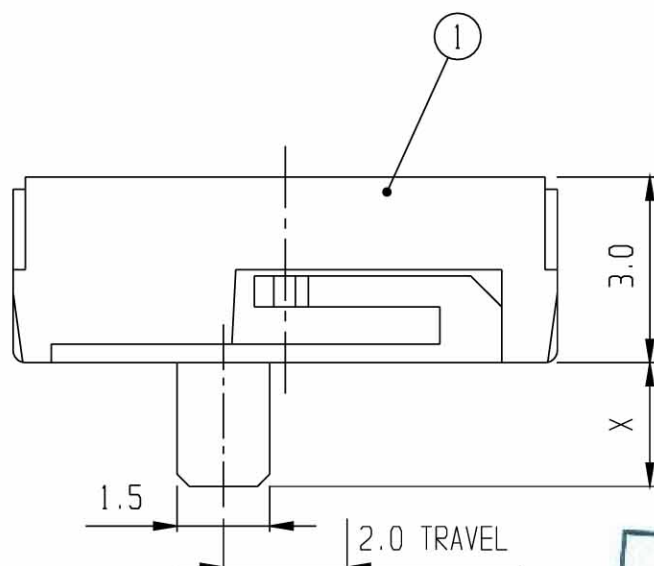



RoHS
Compliance

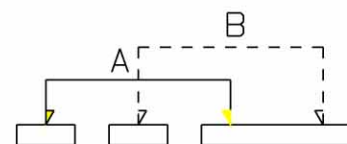

SCHEMATIC



P.C.B. LAYOUT

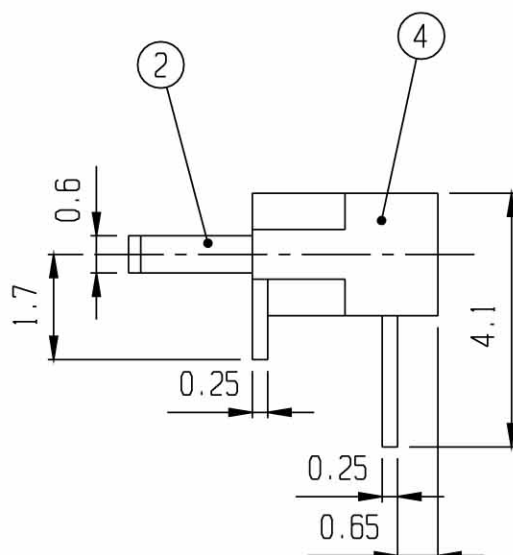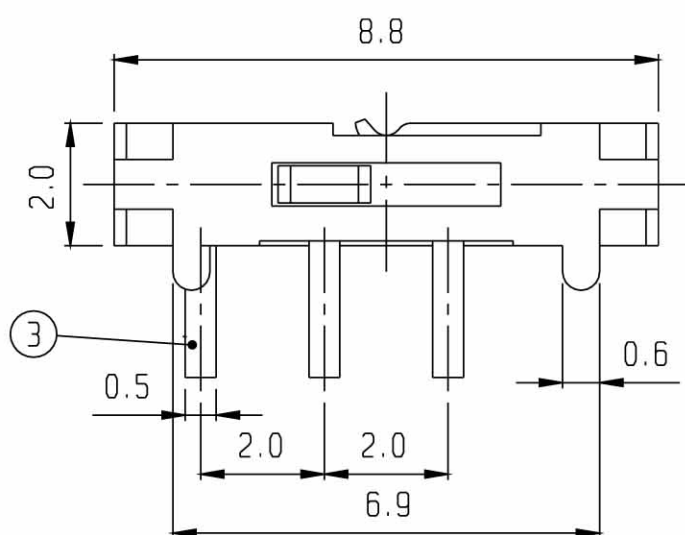

5	CONTACT	CuBe	1	Ag PLATED				
3	TERMINAL	BRASS	3	Ag PLATED	4	COVER	S U S	1
1	FRAME	NYLON 46	1	BLACK	2	KNOB	NYLON 46	1
CGA 2								
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY

ISSUED

SPECIFICATION

TITLE: MINIATURE
SIDE KNOB SLIDE SWITCH (1P2T)

RATING: DC 12V 0.1A

CONTACT RESISTANCE: 70mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

WITHSTAND VOLTAGE: AC 100V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: MSK-12D01

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 8:1

1.0 TO 10.0:±0.2 VERSION: 03

OVER 10.0:±0.3 DRWG NO: 002

DWN. hno

CHK'D. pm

APPD. [Signature]

BY: [Signature]

DATE: 07-AUG-2007

VIMEX
INTERNATIONAL CORPORATION

