


SCHEMATIC



PCB LAYOUT

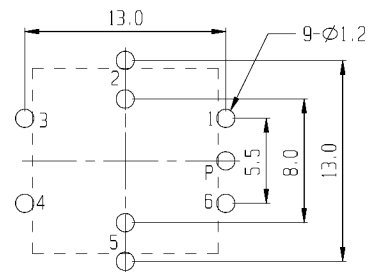

7	SPRING	STEEL WIRE	1	Au PLATED					
5	CONTACT	BRASS	1	Au PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	7	Au PLATED	4	COVER	NYLON	1	
1	FRAME	NYLON	1		2	KNOB	P O M	2	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: PUSH SLIDE SWITCH (1P6T)		
	RATING: DC 30V 1A	MODEL NO: PS-16C01		
	CONTACT RESISTANCE: 100mΩ max.			
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN. <i>hms</i>
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1	SCALE: 3:1	CHK'D. <i>hms</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 01	APPD. <i>hms</i>
	SWITCHING LIFE: 5K cycles min.	OVER 10.0:±0.3	DRWG NO:	

BY: *[Signature]*
DATE: 21-JUL-2004

