






Non-shorting



SCHEMATIC



PCB LAYOUT

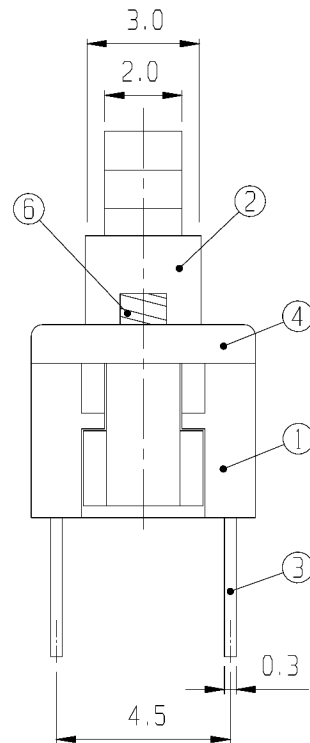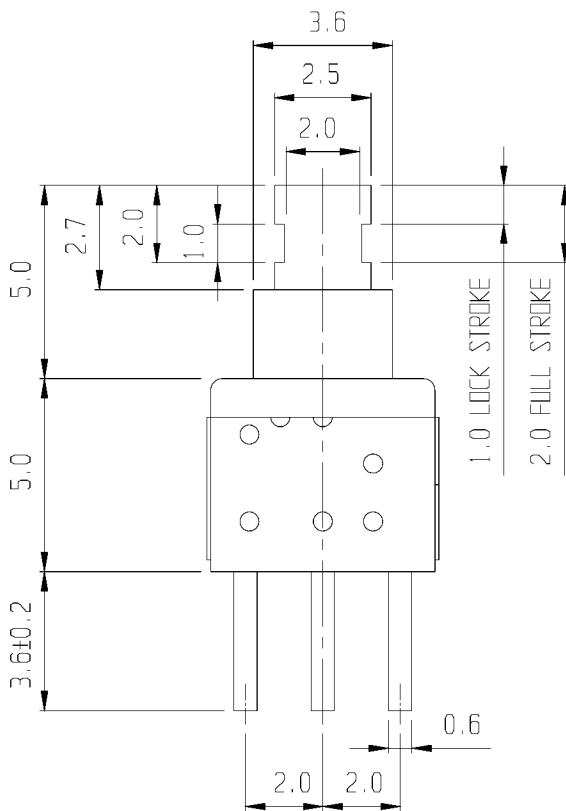

7	HOOK	S U S	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1 HW	
1	FRAME	NYLON	1	HGY	2	KNOB	P O M	1 HW	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION				TITLE: PUSH SLIDE SWITCH (2P2T) (LOCK)					
	RATING: DC 30V 0.1A				MODEL NO: PS-22D05L					
	CONTACT RESISTANCE: 70mΩ max.				TOLERANCE		UNIT: MM		DWN.	<i>hms</i>
	INSULATION RESISTANCE: 100MΩ at 500V DC				UP TO 1.0:±0.1		SCALE: 5:1		CHK'D.	<i>hms</i>
	WITHSTAND VOLTAGE: AC 250V for 1 minute				1.0 TO 10.0:±0.2		VERSION: 04		APPD.	<i>[Signature]</i>
	OPERATION FORCE: REFER ATTACH SPECIFICATION				OVER 10.0:±0.3		DRWG NO:			
	SWITCHING LIFE: 10K cycles min.									

BY: *[Signature]*
DATE: 22-JUL-2005

