






Non-shorting



SCHEMATIC



PCB LAYOUT

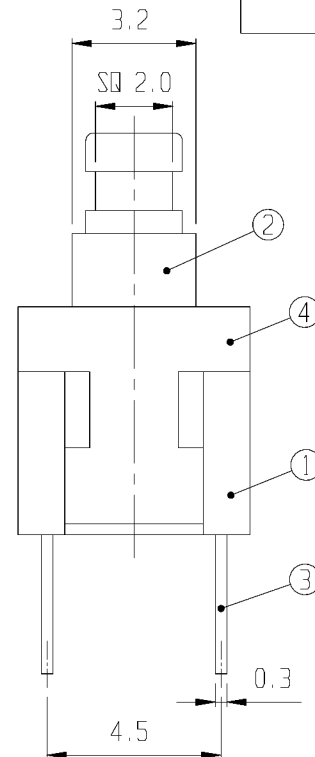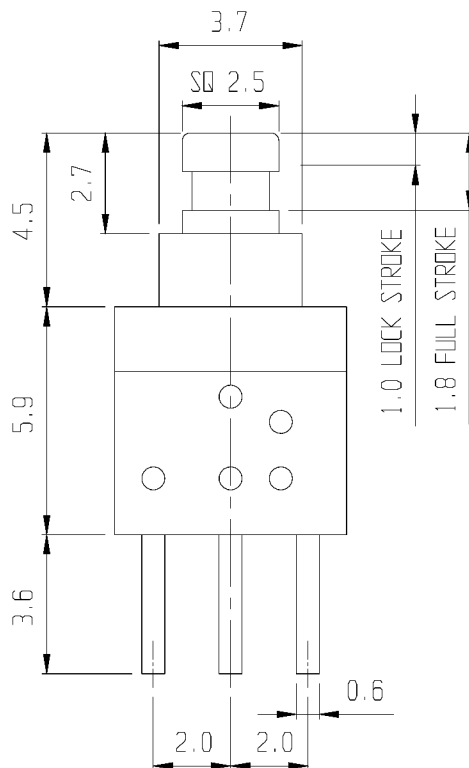

7	HOOK	S U S	1						
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	COVER	P O M	1	HB
1	FRAME	NYLON	1	HB	2	KNOB	P O M	1	HB
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH (2P2T)
(LOCK)

RATING: DC 30V 0.1A

CONTACT RESISTANCE: 70mΩ max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-22D06L

TOLERANCE

UP TO 1.0:±0.1

1.0 TO 10.0:±0.2

OVER 10.0:±0.3

UNIT: MM

SCALE: 5:1

VERSION: 01

DRWG NO:

DWN.

CHK'D.

APPD.

BY:

DATE: 30-MAR-2004

