




NON-SHORTING


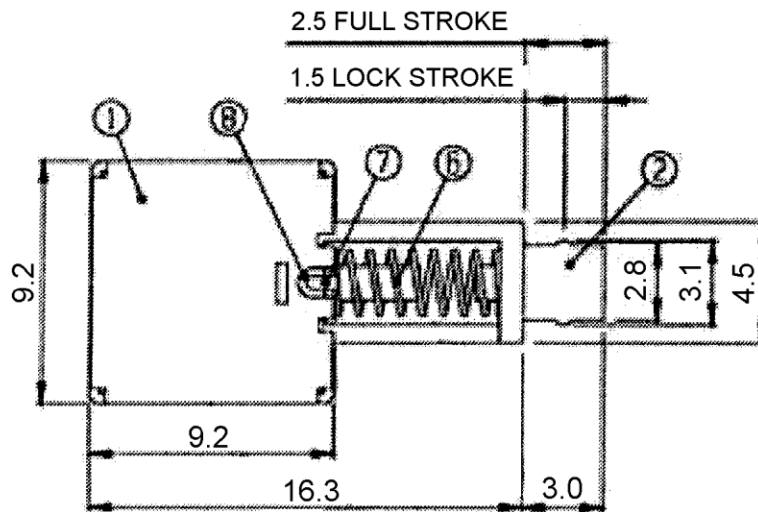


SCHEMATIC



PCB LAYOUT

RoHS
Compliance

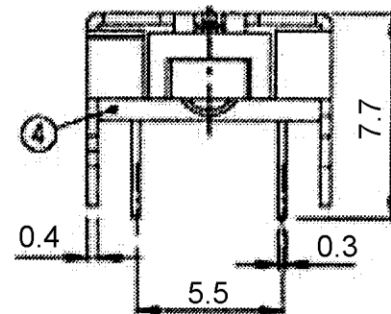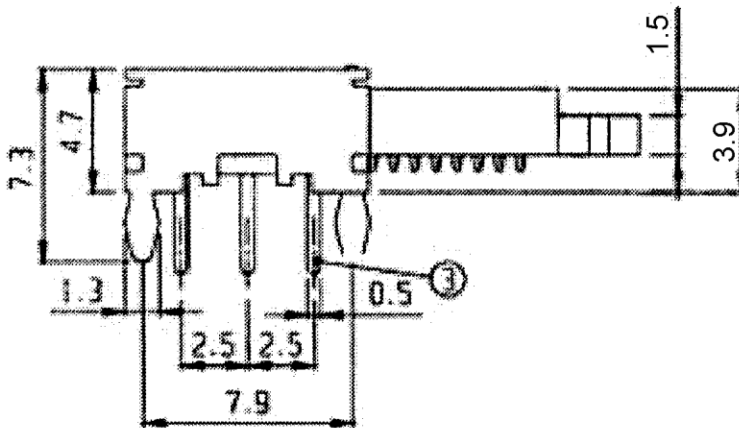

7	HOOK	BRASS	1		8	LOCK PLATE	P B S	1	
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	SPCC	1	Ni PLATED	2	KNOB	P O M	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED		SPECIFICATION		TITLE: PUSH SLIDE SWITCH (2P2T) (LOCK)					
BY:  DATE: 05-JUN-2006		RATING: DC 30V 0.3A		MODEL NO: PS-22E50(L)					
		CONTACT RESISTANCE: 30mΩ max.							
		INSULATION RESISTANCE: 500MΩ at 500V DC		TOLERANCE		UNIT: MM		DWN.	
		WITHSTAND VOLTAGE: AC 500V for 1 minute		UP TO 1.0: ±0.1		SCALE: 4:1		CHK'D.	
		OPERATION FORCE: REFER ATTACH SPECIFICATION		1.0 TO 10.0: ±0.2		VERSION: 02		APPD.	
		SWITCHING LIFE: 10K cycles min.		OVER 10.0: ±0.3		DRG NO:			
									