

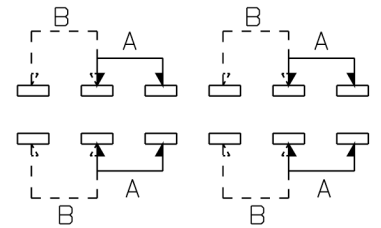


Non-shorting


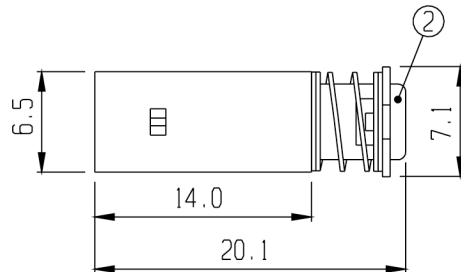


SCHEMATIC

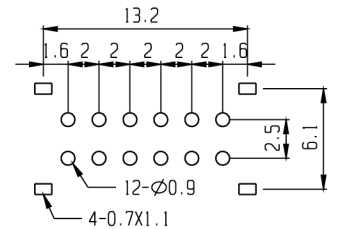

PCB LAYOUT

RoHS
Compliance

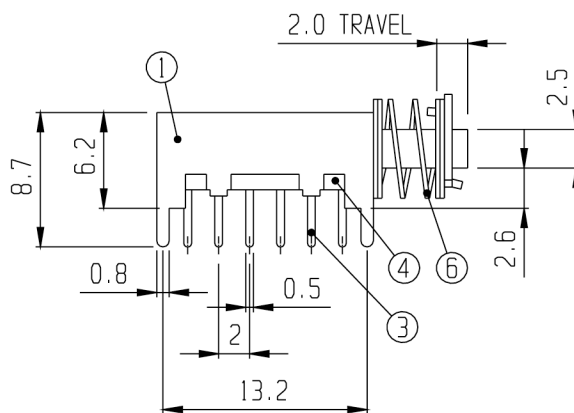

7	"E" PLATE	SPCC	1	Ni PLATED					
5	CONTACT	P B S	4	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	12	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	SPCC	1	Ni PLATED	2	KNOB	P O M	1	BLACK
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH(4P2T)
(UNLOCK)

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 500MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-42D01

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 2:1

1.0 TO 10.0:±0.2 VERSION: 1

OVER 10.0:±0.3 DRWG NO:

DWN. *Jun*
CHK'D. *Jun*
APPD. *Lin-74*

BY: *Lin-74*

DATE: 24-JUN-2013

