

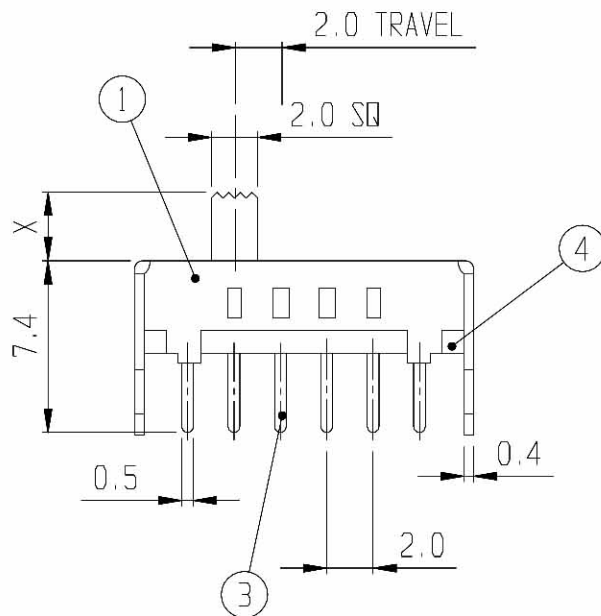
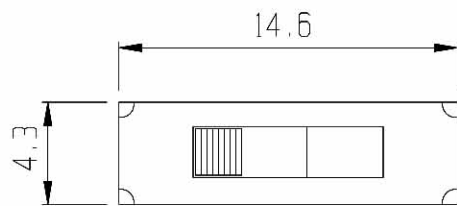


SCHEMATIC

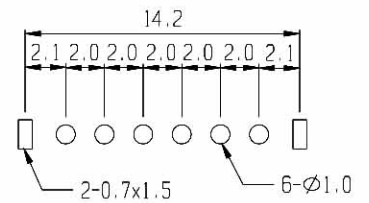

PCB LAYOUT

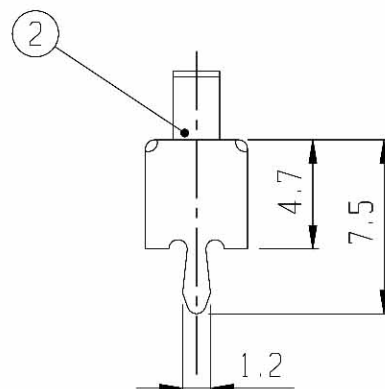

**RoHS
Compliance**

5	CONTACT	P B S	1	Ag PLATED	6	SPRING	P B S	2	
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	EG 2-7
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (1P4T)

RATING: DC 30V 0.5A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 500MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-14D13

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 3:1

1.0 TO 10.0:±0.2 VERSION: 01

OVER 10.0:±0.3 DRWG NO: 003

DWN. *hms*

CHK'D. *pm*

APPD. *[Signature]*

BY: *[Signature]*

DATE: 03-MAR-2004

