


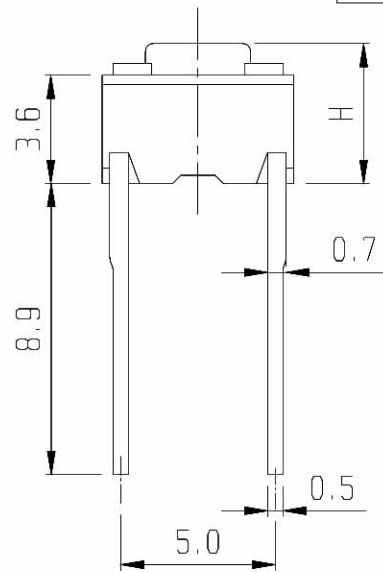


**RoHS
Compliance**

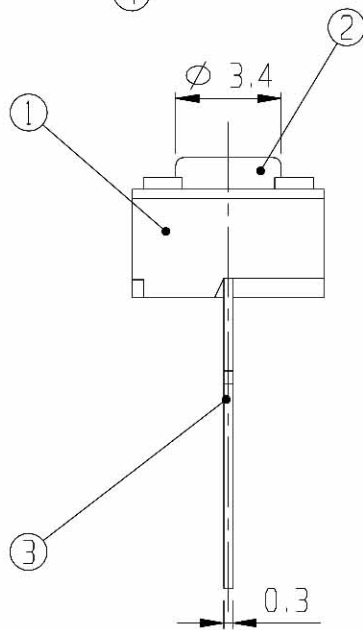

SCHEMATIC



PCB LAYOUT

MODEL NO.	H	MODEL NO.	H
TC-00102-00	4.30	TC-00102(C)-00	9.50
TC-00102(A)-00	5.00	TC-00102(D)-00	13.00
TC-00102(B)-00	7.30	TC-00102(E)-00	7.00

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	2	Ag PLATED	4	COVER BOARD	POLYESTER FILM	1	
1	FRAME	NYLON	1		2	NOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE:	TACT SWITCH
	RATING: DC 12V 50mA	MODEL NO:	TC-00102-00
	CONTACT RESISTANCE: 100mΩ Max.		
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	UP TO 1.0:±0.1	SCALE: 4:1
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02
	SWITCHING LIFE: 100k Cycles Min.	OVER 10.0:±0.3	DRWG NO:
BY:			
DATE: 01-AUG-2006			

VIMEX
INTERNATIONAL CORPORATION

