

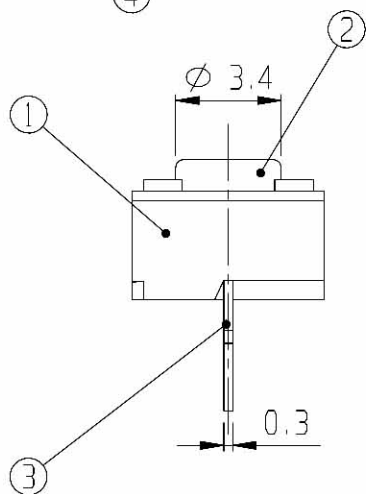
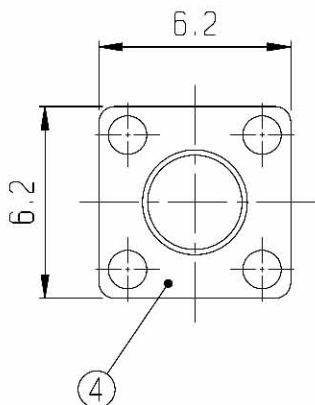


SCHEMATIC



PCB LAYOUT

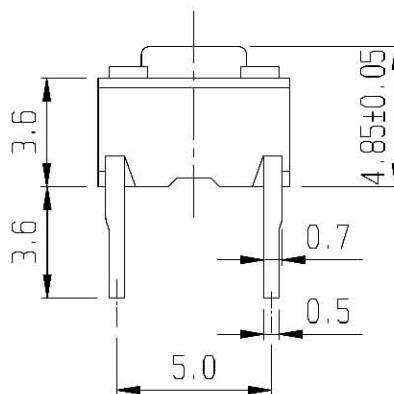

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	2	Ag PLATED	4	COVER BOARD	POLYESTER FILM	1	
1	FRAME	NYLON	1		2	KNOB	P C	1	HB
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA

CONTACT RESISTANCE: 100mΩ Max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute.

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-00102-02

TOLERANCE

UNIT: MM

UP TO 1.0:±0.1

SCALE: 4:1

1.0 TO 10.0:±0.2

VERSION: 03

OVER 10.0:±0.3

DRWG NO: CS029

DWN.

CHK'D.

APPD.

BY:

DATE: 01-AUG-2006

