

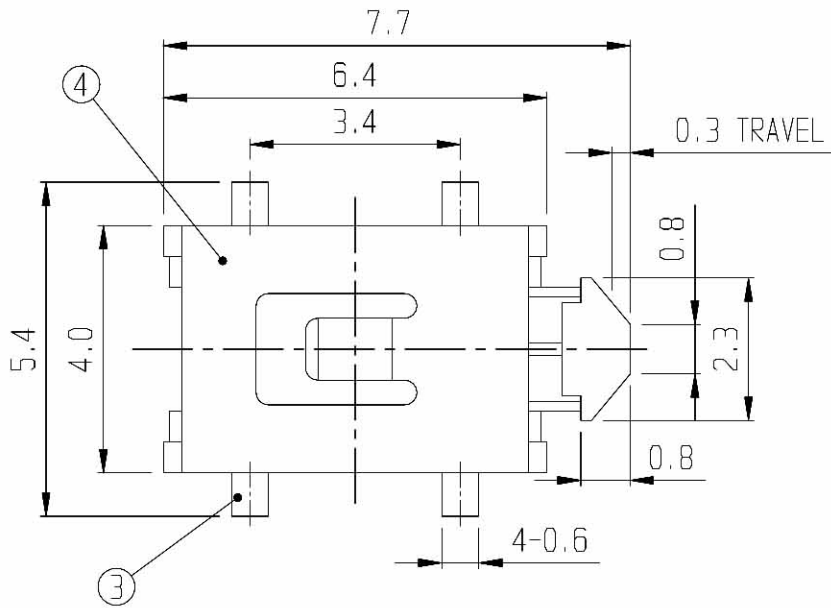



SCHEMATIC

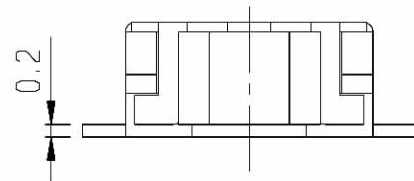

PCB LAYOUT

RoHS
Compliance

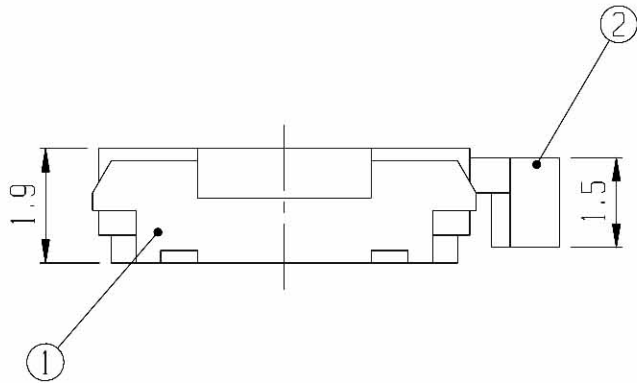

5	CONTACT	S U S	1		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE:	TACT SWITCH
	RATING: DC 12V 50mA	MODEL NO:	TC-26401-N
	CONTACT RESISTANCE: 100mΩ Max.		
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	UP TO 1.0:±0.1	SCALE: 8:1
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02
	SWITCHING LIFE: 50k Cycles Min.	OVER 10.0:±0.3	DRWG NO:

BY: 
DATE: 18-AUG-2004


INTERNATIONAL CORPORATION

