

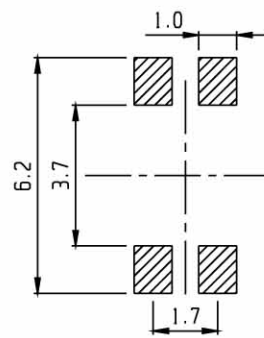


SCHEMATIC

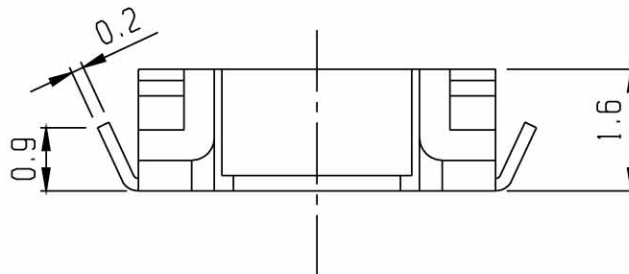

PCB LAYOUT

RoHS Compliance

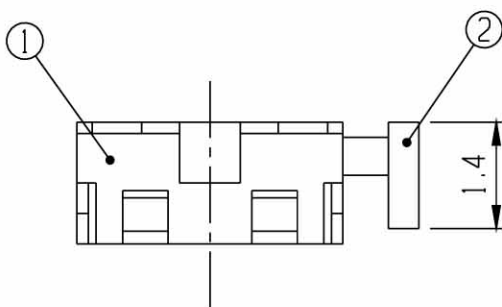

5	CONTACT	S U S	1		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: TACT SWITCH							
	RATING: DC 12V 50mA	MODEL NO: TC-26402-T01-N							
	CONTACT RESISTANCE: 100mΩ Max.								
	INSULATION RESISTANCE: 100MΩ at 500V DC	TOLERANCE	UNIT: MM	DWN.	<i>hro</i>				
	WITHSTAND VOLTAGE: AC 250V for 1 minute.	UP TO 1.0:±0.1	SCALE: 10:1	CHK'D.	<i>ms</i>				
	OPERATION FORCE: REFER ATTACH SPECIFICATION	1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>[Signature]</i>				
	SWITCHING LIFE: 50k cycles Min.	OVER 10.0:±0.3	DRWG NO:						

BY: *[Signature]*
DATE: 14-JUL-2004

