| ALLOWANCE | | MARK | DATE | DESCRIPTION OF REVISION | APPROVED |
|---|---|---|---|---|---|
| UNDER 3 | ± 0.1 | △1 | 02. 4 .24 | #4221,#412 조립순서 변경 | |
| 3 TO 6 | ± 0.2 | △ | . . | | |
| 6 TO 18 | ± 0.3 | △ | . . | | |
| 18 TO 50 | ± 0.4 | | | | |
| 50 OVER | ± 0.5 | | | | |

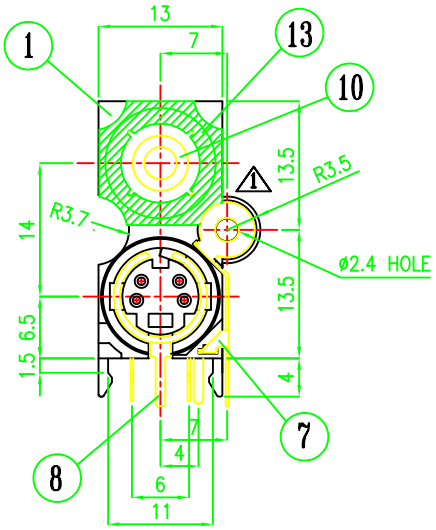


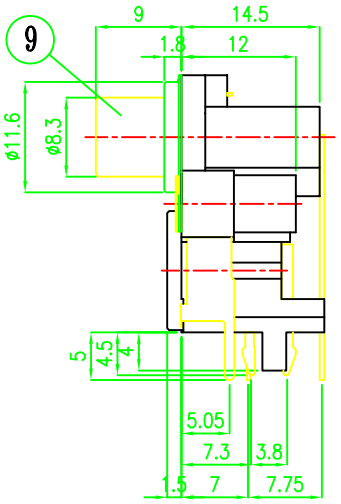


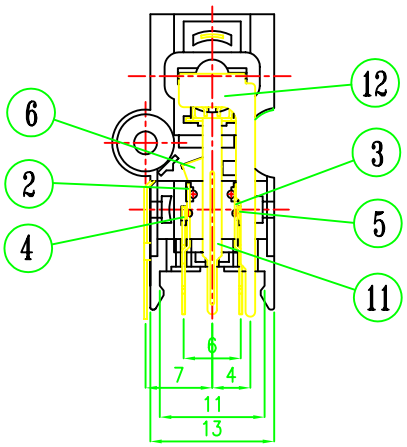


PIN JACK SCHEMATIC




| MODEL NO. | MONO TYPE | SWITCH TYPE |
|---|---|---|
| |  Circuit (Plug insert face) |  Circuit (Plug insert face) |
| WITHOUT SHIELD PLATE | C5016031□□ | C5016031□□ |
| WITH SHIELD PLATE | C5016031□□ | C5016031□□ |

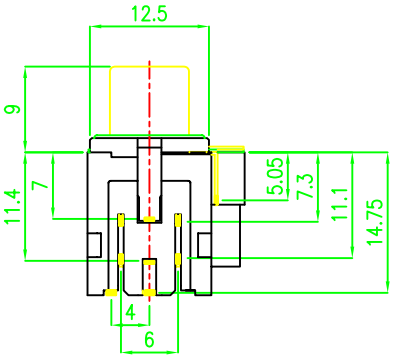


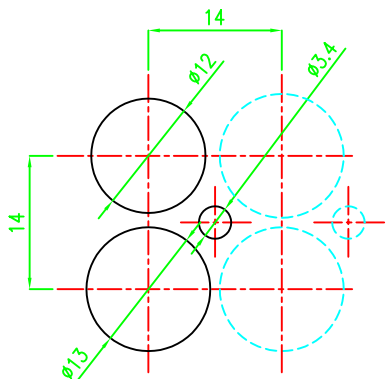


PANEL MOUNT HOLE

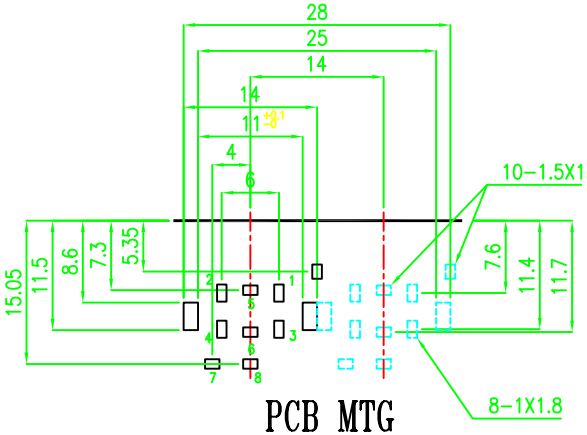


PCB MTG
(SOLDER SURFACE)




| NO | PART NAME | MATERIAL | | QUANTITY | PART NO | REMARKS |
|---|---|---|---|---|---|---|
| 13 | GND PLATE | C2600 1-0 | 0.3t | 1 | 2P4221 | - PLATING |
| 12 | PIN-L | C2680 H | 0.5t | 1 | 2P041 | - PLATING |
| 11 | TERMINAL | C2680 1/2H | 0.3t | 1 | 2P365 | - PLATING |
| 10 | WASHER | ABS | 94HB | 1 | 2M616 | |
| 9 | CAP | C2600 1-0 | 0.3t | 1 | 1P065 | - PLATING |
| 8 | CAP GROUND | C2680 1/2H | 0.35t | 1 | 1P413 | - PLATING |
| 7 | SHIELD PLATE | C2680 1/2H | 0.3t | 1 | 2P412 | - PLATING |
| 6 | SWITCH TER' | C5210 H | 0.2t | 1 | 2P411 | - PLATING |
| 5 | TER'-L | C5210 H | 0.2t | 1 | 2P410L | - PLATING |
| 4 | TER'-R | C5210 H | 0.2t | 1 | 2P410R | - PLATING |
| 3 | TER'-L | C5210 H | 0.2t | 1 | 2P409L | - PLATING |
| 2 | TER'-R | C5210 H | 0.2t | 1 | 2P409R | - PLATING |
| 1 | BASE | NORYL | | 1 | 2M795 | BLACK |

VIMEX INTERNATIONAL CORPORATION

SCALE 1/1 DIMENSION m/m

| REVISION | DRAWING | CHECKED | APPROVED | NAME TITLE | S-VHS JACK(1P) + PIN JACK(1P) |
|---|---|---|---|---|---|
| 1.1 | 2001.08.10 | 2001.08.10 | 2001.08.10 | DRAWING NUMBER | C5016031□□ |