



PCB MOUNTING HOLES(±0.1)  
(VIEWED FROM COPPER SIDE)

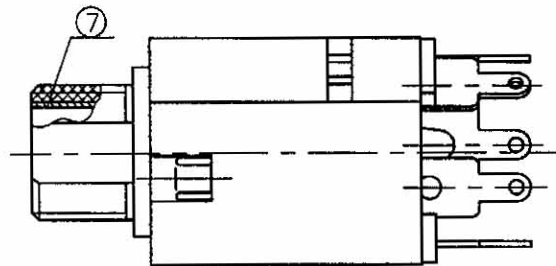

CIRCUIT DIAGRAM

NO.	NAME	QTY	MATERIAL(THICK,COLOR)	REMARK
7	SLEEVE	1	H59 (COPPER ALLOY)	Ni-PLATED(Cu±2-3um, Ni±2-3um)
6	BODY	1	ABS 94V-0	
5	5# TERMINAL	1	H62Y t=0.4 (C2680R-H)	Ag-PLATED(Cu±2-3um, Ag±0.3um)
4	4# TERMINAL	1	H62Y t=0.4 (C2680R-H)	Ag-PLATED(Cu±2-3um, Ag±0.3um)
3	3# TERMINAL	1	QSn6.5-0.1Y t=0.35 (C5210R-H)	Ag-PLATED(Cu±2-3um, Ag±0.3um)
2	2# TERMINAL	1	QSn6.5-0.1Y t=0.4 (C5210R-H)	Ag-PLATED(Cu±2-3um, Ag±0.3um)
1	1# TERMINAL	1	QSn6.5-0.1Y t=0.4 (C5210R-H)	Ag-PLATED(Cu±2-3um, Ag±0.3um)

ANGLES(DEG)	± 5°
L < 6	± 0.15
6 < L < 20	± 0.2
L > 20	± 0.3

TOLERANCES EXCEPT AS NOTED



SCALE: 1:1	NAME: PHONE JACK
VIEW:	CAT.NO. SCJ-0632HA
UNIT: mm	